# Floor Plan

# 3.01.01 C
# CCU Bedroom

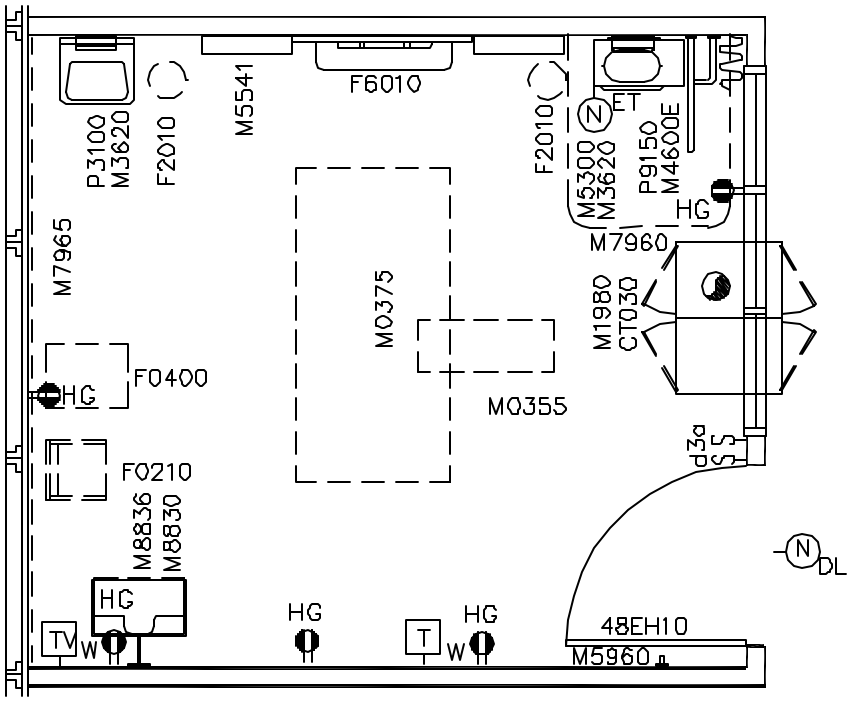


JULY 1988

0' 1' 2' 4' 8' 12'

Graphic Scale 1/4" = 1'-0"

# Reflected Ceiling Plan

3.01.01 D
CCU Bedroom

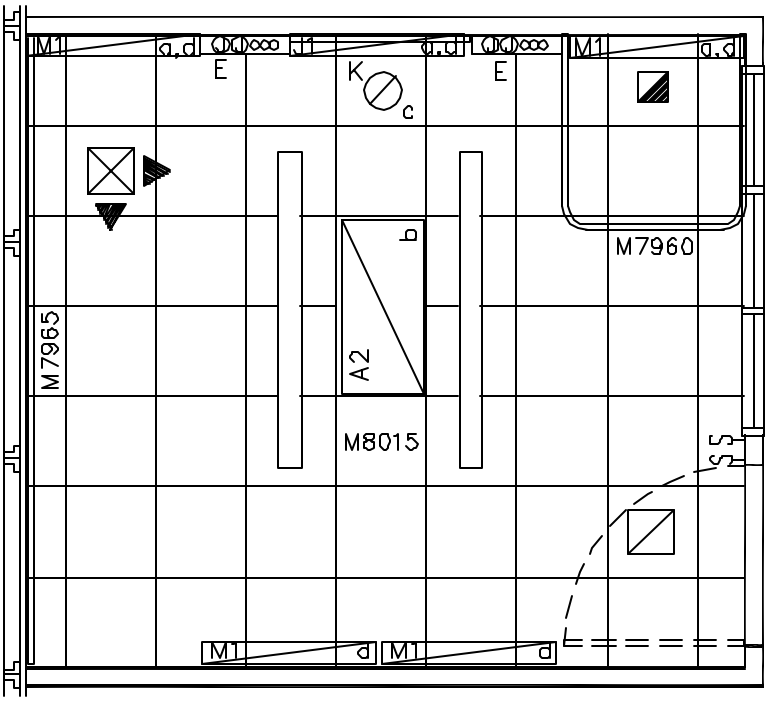


JULY 1988

0' 1' 2' 4' 8' 12'
Graphic Scale
1/4" = 1'-0"

# Functional Diagram

# 3.01.01 B
# CCU Bedroom

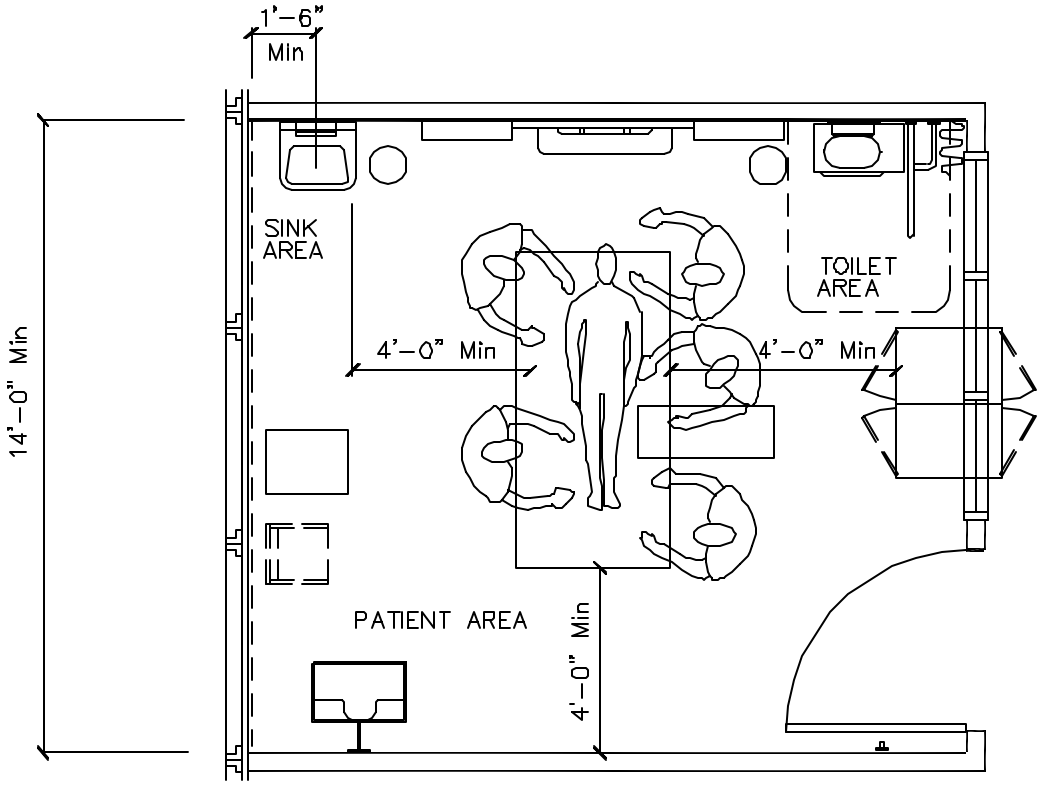


JULY 1988




Graphic Scale 1/4" = 1'-0"

# Composite Plan

# 3.01.01 E
# CCU Bedroom

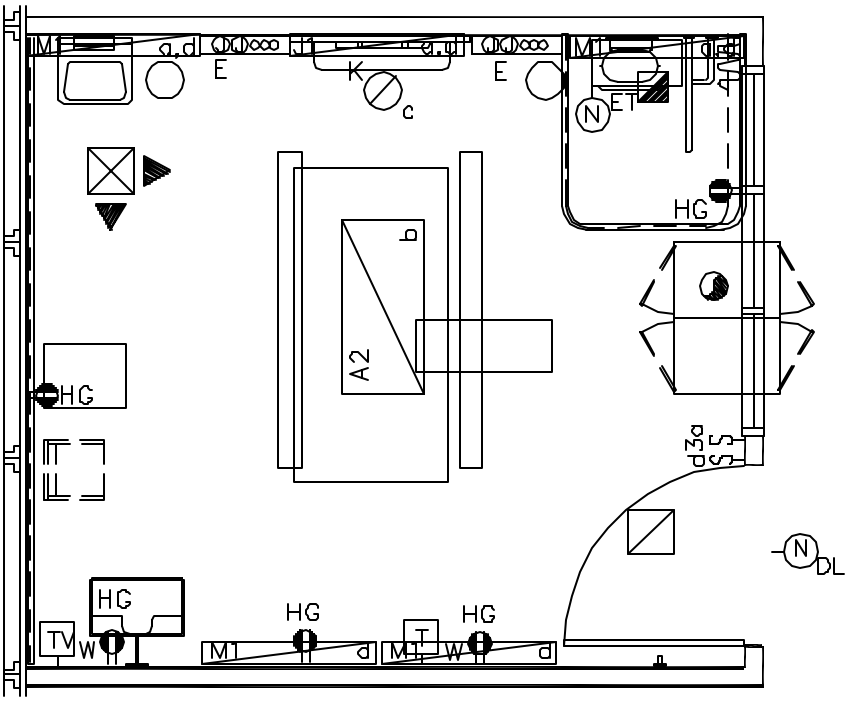


JULY 1988

0' 1' 2' 4' 8' 12'

Graphic Scale

1/4" = 1'-0"

# Matrix Data

# 3.01.01 A
# CCU Bedroom

## ARCHITECTURAL/ACOUSTICS

| | | |
|---|---|---|
| Square Foot Area Net | – | 220 |
| Finishes – Walls | – | GW |
| – Base | – | R |
| – Floor | – | VCT |
| – Ceiling | – | ACT |
| Ceiling Ht | – | 8'–0" |
| Door Size & Type | – | 48E |
| Hardware Set | – | H10 |
| Ambient Noise Level | – | NC 25–30 |
| Speech Privacy Level | – | Normal |
| Architectural Notes | – | 20,24<br>ref pp 5–6 |

## ELECTRICAL

| | | |
|---|---|---|
| Ambient Illum (FC) | – | 30 |
| Task Illum (FC) | – | 30 (Reading) 100 (Exam) |
| Luminare Type | – | A2,J1,K,M1 |
| Switching | – | Multi–sw & Std–by Area |
| Electrical Notes | – | 12,13,14,15,16,38<br>ref pp 20–23 |

## MECHANICAL

| | | |
|---|---|---|
| Total Air Changes | – | 6 |
| Outside Air Changes | – | 1.5 |
| Room Pressure(%) | – | +10 |
| Temperature (F) | – | 70–78 |
| Relative Hum(%) | – | 50–60 |
| Exhaust Air | – | No |
| Return Air | – | Yes |
| Filtration(%) | – | 25,80,0 |
| Mechanical Notes | – | 13,15<br>ref pp 13–15 |

## MECHANICAL PIPING

| | | |
|---|---|---|
| Cold Water | – | Yes |
| Hot Water | – | Yes |
| Treated Water | – | No |
| Chilled Water | – | No |
| Waste/Vent | – | Yes |
| Floor Drain | – | No |
| Steam | – | No |
| Condensate | – | No |
| Piping Notes | – | 5<br>ref pp 16 |

| | | Qty |
|---|---|---|
| M5541 | – | 1 |

## EQUIPMENT PROGRAM

| J.S.N. Code | Nomenclature | Qty | Log Cat |
|---|---|---|---|
| CT030 | Counter Top – P.L. | 1 | A |
| F6010 | Bumper, Hospital Bed | 1 | A |
| M1980 | Nurse Server U/C | 1 | A |
| M3620 | Dispenser, Paper Towel | 2 | A |
| M4600D | Grab Bar, Outrigger–Left | 1 | A |
| M5300 | Mirror 14 X 20 | 1 | A |
| M5541 | Patient SVC Console–ICU | 1 | A |
| M5960 | Coat Hook | 1 | A |
| M7960 | Track & Curtain, Cubicle | 1 | A |
| M7965 | Drapery Track | 1 | A |
| M8015 | IV Track ICU | 1 | A |
| P3100 | Lavatory, Wall Hung | 1 | A |
| P9150 | Cabinet Toil/Lav | 1 | A |
| M8836 | Wall Bracket, Tv | 1 | B |
| F0210 | Chair, Visitor | 1 | C |
| F0400 | Cabinet, Bedside | 1 | C |
| F2010 | Waste Receptacle SS | 2 | C |
| M0355 | Table, Overbed | 1 | C |
| M0375 | Bed, Hospital, ICU | 1 | C |
| M8830 | Television Set | 1 | C |

## COMMUNICATION PROGRAM

| Commo Code | Nomenclature | Qty | Log Cat |
|---|---|---|---|
| NC001 | Single Patient Station | 1 | A |
| NC0DL | Dome Light – 3 Lamp | 1 | A |
| NC0ET | Emergency Pullcord Station | 1 | A |
| TL00H | Wall Outlet | 1 | A |
| TL0HK | CAPOC Outlet | 1 | A |
| TS00H | Service Console Outlet | 1 | A |
| TS00W | Wall Outlet–36" AFF | 1 | A |
| TV00W | Wall Outlet–12" Below Ceiling | 1 | A |

Comunication Notes – 17
ref pp 29–30